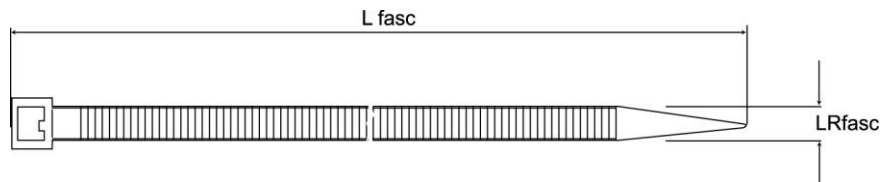
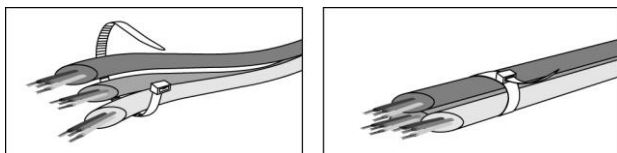


SCHEDA TECNICA - TECHNICAL SHEET**FS**Fascetta per cablaggio in nylon
Nylon cable tieRev: 06
Pag. 1/1**DATI TECNICI - TECHNICAL DATA**

dt = diametro tubo / tube diameter
 LRfasc = larghezza fascetta / fastener width
 Lfasc = lunghezza fascetta / fastener length

| dt max [mm] | Lfasc [mm] | LRfasc [mm] | Resistenza a trazione minima Min tensile resistance [kgf] | Fascetta nera Black cable tie Cod. | Fascetta Bianco White cable tie Cod. | Fascetta Verde Green cable tie Cod. |
|-------------|------------|-------------|--|--|--|---|
| 15 | 80 | 2,4 | 8,0 | 36300p24080 | 36300m24080 | |
| 22 | 100 | 2,5 | 8,1 | 36300p25100 | 36300m25100 | 36300z25100 |
| 33 | 140 | 2,5 | 8,1 | 36300p25142 | 36300m25142 | |
| 40 | 160 | 2,5 | 8,1 | 36300p25160 | 36300m25160 | |
| 53 | 200 | 2,5 | 8,1 | 36300p25203 | 36300m25203 | |
| 33 | 140 | 3,6 | 18,2 | 36300p36140 | 36300m36140 | |
| 33 | 150 | 3,6 | 18,2 | | | 36300z36150 |
| 53 | 200 | 3,6 | 18,2 | 36300p36203 | 36300m36203 | 36300z36203 |
| 76 | 300 | 3,6 | 18,2 | 36300p36300 | 36300m36300 | |
| 102 | 370 | 3,6 | 18,2 | 36300p36370 | 36300m36370 | |
| 24 | 120 | 4,8 | 22,2 | 36300p48120 | 36300m48120 | |
| 38 | 160 | 4,8 | 22,2 | 36300p48160 | 36300m48160 | |
| 46 | 190 | 4,8 | 22,2 | | | 36300z48190 |
| 50 | 200 | 4,8 | 22,2 | 36300p48200 | 36300m48200 | |
| 60 | 250 | 4,8 | 22,2 | 36300p48250 | 36300m48250 | |
| 76 | 300 | 4,8 | 22,2 | 36300p48300 | 36300m48300 | 36300z48300 |
| 102 | 370 | 4,8 | 22,2 | 36300p48370 | 36300m48370 | |
| 110 | 430 | 4,8 | 22,2 | 36300p48432 | 36300m48432 | |
| 52 | 203 | 7,6 | 54,4 | 36300p76200 | 36300m76200 | |
| 76 | 300 | 7,6 | 54,4 | 36300p76300 | 36300m76300 | |
| 102 | 370 | 7,6 | 54,4 | 36300p76370 | 36300m76370 | |
| 132 | 450 | 7,6 | 54,4 | 36300p76450 | 36300m76450 | |
| 140 | 533 | 7,6 | 54,4 | 36300p76533 | 36300m76533 | |
| 228 | 776 | 9,0 | 79,4 | 36300p90776 | 36300m90776 | |

INSTALLAZIONE - INSTALLATION

| | |
|--|--------------|
| Temperatura di posa: Installation temperature: | -10 / +60 °C |
| Temperatura di esercizio : Working temperature: | -40 / +85 °C |
| Autoestinguento a norma UL 94 – classe V2 Fire resistant in compliance with norm UL 94 – class V2 | |

**CARATTERISTICHE ANCORANTE
PRODUCT FEATURES**

| | |
|-----------------------|-----------------------|
| Tipo Type | Materiale Material |
| Fascetta Cable tie | Nylon Pa 66 |